

F-Chem® Product Data

Applications

- Potable Water
- Brine Solutions
- Chemical Processing
- Crude Oil & Gas
- pH 2-13 Solutions
- Food Processing
- Saltwater Handling
- CO₂
- Wastewater
- Cooling Water
- Produced Water
- Effluent Drains

Materials and Construction

All pipe manufactured by filament winding process using vinyl ester thermosetting resin. **F-Chem** pipe can be provided with custom tailored vinyl ester resin systems, reinforced corrosion and abrasion resistant barriers, reinforced structural walls and joining techniques to meet specific project requirements. The pipe is available in 14"-72" diameters.

Fittings

Fittings are manufactured with the same **chemical/temperature** capabilities as the pipe. Depending on the particular part and size, fittings will be contact molded, hand fabricated or filament wound.

Joining Systems

Bell & Spigot

Matched-taper joint secured with epoxy adhesive. Self-locking feature resists movement, facilitating joining runs of pipe without awaiting adhesive cure.



Butt & Wrap

Plain end pipes or pipe and fittings butted together and wrapped with multiple layers of resin-saturated mat or woven roving.




Flanged

Available for all piping systems and diameters; factory assembled or shipped loose for assembly in the field.



F-CHEM LARGE DIAMETER FITTINGS

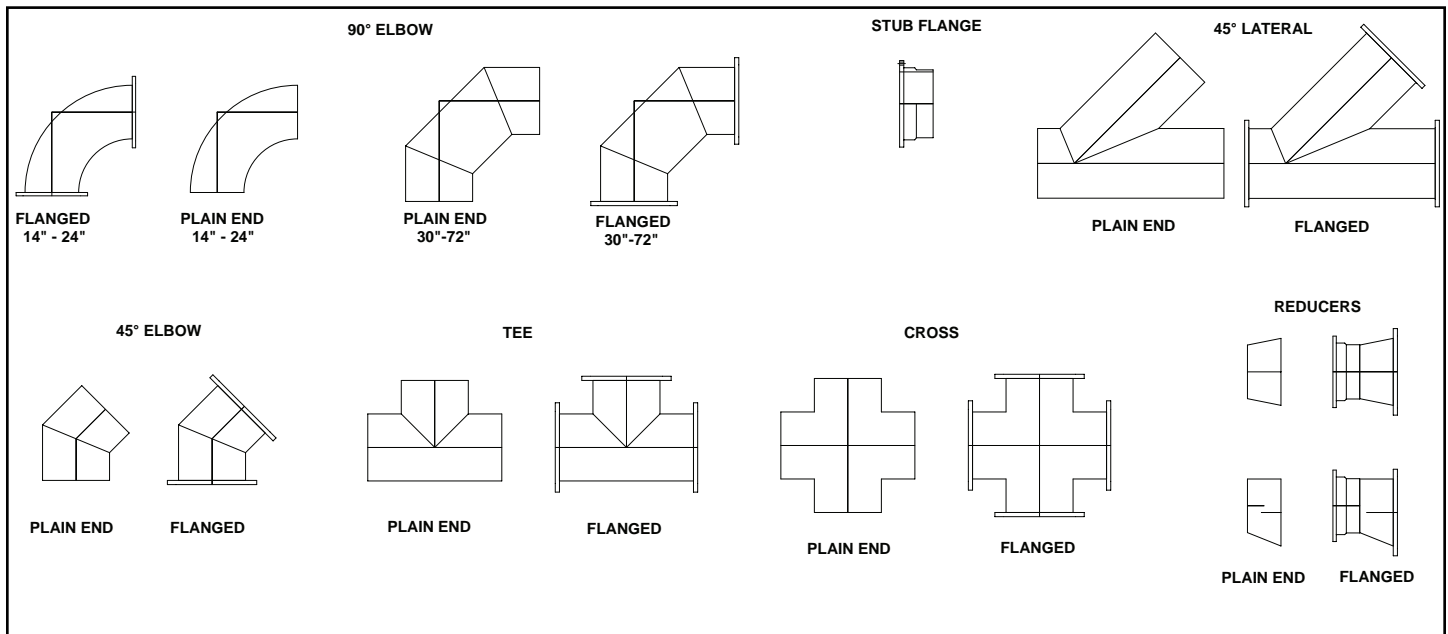

F-Chem® Product Data

Average Physical Properties				
Property	75°F psi	24°C MPa	175°F psi	79°C MPa
Axial Tensile - ASTM D2105				
Ultimate Stress	9,300	64.1	5,500	37.9
Modulus of Elasticity ⁽¹⁾	1.50 x 10 ⁶	10,342	1.04 x 6	7,171
Poisson's Ratio $\nu_{a/h}$ ($\nu_{h/a}$)				
0.33 (0.73)				
Axial Compression - ASTM D695				
Ultimate Stress	17,900	123.0	14,700	101
Modulus of Elasticity	1.40 x 10 ⁶	9,653	9.00 x 10 ⁵	6,205
Beam Bending - ASTM D2925				
Ultimate Stress	14,500	100.0	8,000	55.2
Modulus of Elasticity (Long Term)	1.99 x 10 ⁶	13,721	1.14 x 10 ⁶	7,860
Hydrostatic Burst - ASTM D1599				
Ultimate Hoop Tensile Stress	40,000	276	40,000	276
Hydrostatic Design - ASTM D2992, Procedure B - Hoop Tensile Stress				
Static 50 Year Life	14,000	96.5	-	-

⁽¹⁾Consult the factory for Modulus of Elasticity values between 75°F and 175°F.

Thermal Expansion Coefficient - ASTM D696 (Insulated Pipe)	10.5 x 10 ⁻⁶ in/in/°F	18.9 x 10 ⁻⁶ mm/mm/°C
Thermal Conductivity	0.11 BTU/hr-ft-°F	0.06 W/m-°C
Specific Gravity - ASTM D792	1.8	
Hazen-Williams Coefficient	150	
Absolute Surface Roughness	0.00021 Inch	0.0053 mm
Manning's Roughness Coefficient, n	0.009	

ASTM D2996 Designation Codes:

14"-24"	RTRP-12EU-3111
---------	----------------

The scope of ASTM D2996 is limited to 24" and smaller

ASTM D2310 Designation Codes

30"-72"	RTRP-12EU
---------	-----------

Mechanical properties cell classifications shown are minimum. Actual classifications may be higher for some sizes.

National Specification Compliance:

Pipe is manufactured in compliance with ASTM D2996, ASTM D2310 and ASTM D2992.

The following national specifications are met or exceeded when specified:

Designed in accordance with AWWA M45

Can be manufactured with ANSI/NSF Std. No. 61 approved resin system for potable water usage.

ASTM D6041 fittings

ASME/ANSI B31.3 compliant installation and training.

National Oilwell Varco has produced this brochure for general information only, and it is not intended for design purposes. Although every effort has been made to maintain the accuracy and reliability of its contents, National Oilwell Varco in no way assumes responsibility for liability for any loss, damage or injury resulting from the use of information and data herein nor is any warranty expressed or implied. Always cross-reference the bulletin date with the most current version listed at the web site noted in this literature.



North America

17115 San Pedro Ave. Suite 200
San Antonio, Texas 78232 USA
Phone: 210 477 7500

South America

Avenida Fernando Simoes
Recife, Brazil 51020-390
Phone: 55 31 3501 0023

Europe

P.O. Box 6, 4190 CA
Geldermalsen, The Netherlands
Phone: 31 345 587 587

Asia Pacific

No. 7A, Tuas Avenue 3
Jurong, Singapore 639407
Phone: 65 6861 6118

Middle East

P.O. Box 17324
Dubai, UAE
Phone: 971 4881 3566

www.fgspipe.com • fgspipe@nov.com

Product Sales Office
2700 West 65th Street
Little Rock, Arkansas 72209 USA
Phone: 501-568-4010

NOV Fiber Glass Systems

©2012 National Oilwell Varco. All rights reserved.
CI1900 February 2012