



Mining and Milling

Reliability Solutions for Piping Systems



Mining and Milling

NOV Fiber Glass Systems has a wide selection of lightweight abrasion resistant & corrosion-proof piping systems to provide you with *install it and forget it reliability* in your remote and demanding environment.

Our unique solutions combine innovation with proven technologies. We understand abrasion is only one part of the corrosion/erosion cycle so we embed structurally reinforced epoxy resin pipe and fittings with high alumina ceramic. The result is a piping system with the durability of ceramic and the corrosion-proof structure of epoxy. Ceram Core® products are lightweight and long lasting in abrasive slurries like mine tailings.

Another example of NOV Fiber Glass Systems innovation is Fiberspar™, our GRE and HDPE hybrid pipe that gives you the durability of HDPE and pressures capabilities greater than 1500 psi even at 180°F – this isn't just any composite pipe.

Our proprietary Z-CORE™ resin system outperforms plastic lined steel pipe in the toughest chemical applications for a fraction of the cost and weight.

Whether you need a solution to water hammer for dewatering, or chemical resistance for acids and organics we have the solutions to your challenges. Our broad range of piping systems offers performance from full vacuum to 3,500 psi, temperatures from -75°F up to 275°F for liquids and 300°F for air. These products can be heat traced, steam cleaned, grounded, buried and used for downhole tubing and casing.

Reliability

Our products never need cathodic protection and rarely require thrust blocking. They substantially reduce maintenance because they never rust or corrode.


For fluid conveyance from 1-1/2" to 72"+ for brine, acids, bases, organics, process piping, fuel, abrasive slurries or simply potable water, we have the *install it and forget it* reliability to the piping challenges you face in whatever remote part of the globe mining takes you.

Key Advantages

- **No Maintenance:** Impervious to corrosion and resistant to chemical attack caused by acids, solvents and bases, eliminating the need for protective coatings, wraps or cathodic protection.
- **Low Installation Costs:** Lightweight construction enables easy installation, reducing personnel and equipment needs.
- **Improved Flow Capacity:** Smooth interior pipe surface resists scaling and eliminates corrosion.
- **Long Service Life:** Calculated design life of 20 years, with an actual service life of over 30 years.
- **Reliability:** “Install It and Forget It” performance.


Engineering Design

The NOV Fiber Glass Systems’ Success by Design engineering software sets the industry standard for design assistance. From material selection to flow calculations and comparisons; anchor, guide and support calculations; and thermal expansion solutions, this design package assists the engineer and owner in designing a highly reliable system. Our applications engineers can assist you in the selection of the proper piping system for your application.

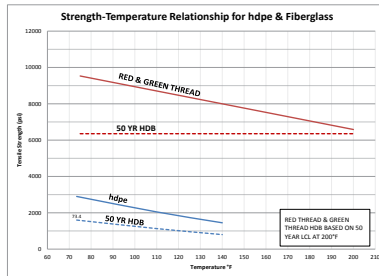

Installation and Fabrication

With regional fabrication locations in North America and around the world, NOV Fiber Glass Systems will rapidly fabricate your project for minimum field installation. All of our fabrication locations are staffed with ASME B31.3 certified bonders. Training and certifications of field installation crews to ASME B31.3 is available.

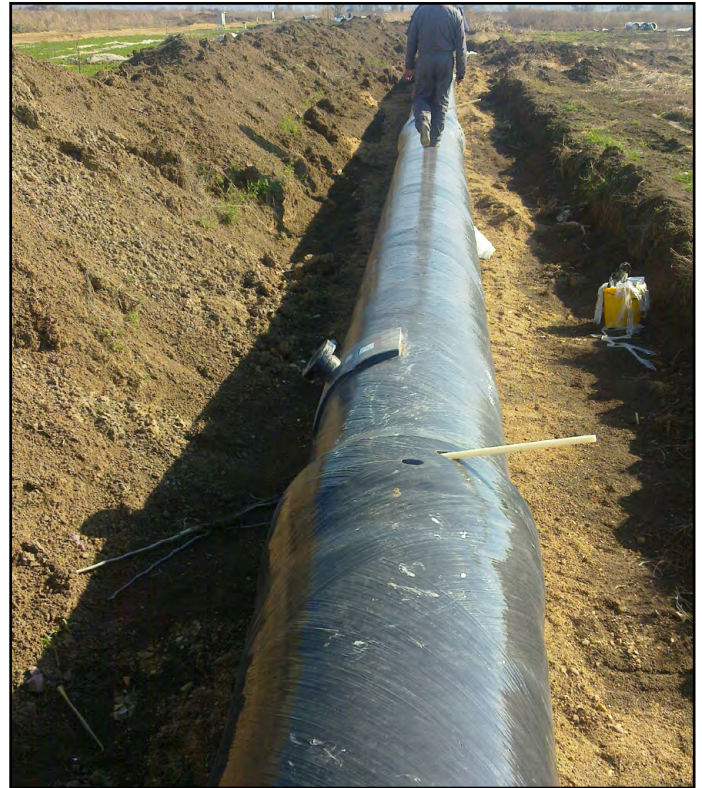


Open Pit Mine - Kostolac, Serbia




Abrasion Resistant & Corrosion-Proof
piping systems provides
Install It and Forget It reliability


Advanced Performance Specialty Products




Z-Core products are a propriety thermosetting resin capable of enduring severe environments such as concentrated sulfuric acid, hydrochloric acid, hot caustics and mixtures of acids, solvents and bases. Z-Core is an excellent alternative to fluoropolymer lined pipe and expensive alloys. Temperature ratings are up to 275°F and 1" to 8" diameters.




Ceram Core are made from high-alumina ceramic beads suspended in an epoxy resin matrix, making it an ideal material for extreme abrasive and corrosive environments. Applications include ore slurries, mine tailings, salt slurries, concrete slurries and Diatomaceous Earth. Diameters are available from 6" to 16"




Silver Streak products are made for abrasive applications. This product is available 1"-48" diameters with a pressure rating up to 225 psig and a temperature rating up to 225°F (107°C).



Downhole Tubing & Casing products are capable of pressure up to 3500 psig and temperatures of 210°F (99°C) for corrosive application like CO₂, saltwater/brine and other such services for methane gas, chemical disposal or brackish water wells. Diameters are available from 1½"-9" for pressures up to 3500 psig and diameters up to 24" for lower pressure brackish/RO water wells.




Fiberspar LinePipe products are continuous spoolable piping systems with HDPE liners wrapped with a glass fiber epoxy thermoset matrix for corrosive and abrasive applications up to 2500 psig and up to 180°F (65°C). Diameters are available 2½"-6½" and continuous lengths up to 2 miles. A downhole version is available.




High Pressure products are available in sizes 1½"-36" diameter for pressure of 150 psig up to 4000 psig at temperatures up to 210°F (99°C). Typical applications include water, hydraulic fluids, and other difficult mining and milling applications in a variety of industries including severe elevation changes.


Joining Systems



Key Lock™ - Self-restrained mechanical joint provides quick assembly by means of locking keys inserted between bell and spigot. Used to install Bondstrand 2400 series pipe in sizes 2"-40" (50 - 1000 mm) .




Flanged - Available for all piping systems and diameters; factory assembled or shipped loose for assembly in the field.




Taper x Taper - Matched taper joint secured with epoxy adhesive. Self locking feature resists movement, facilitating joining on RT/GT HP 16/20/25 bar piping without awaiting adhesive cure.



Butt & Wrap - Plain end pipe or pipe and fittings butted together and wrapped with multiple layers of resin-saturated glass reinforcement. For use with all piping systems.



Quick™ Lock - Straight spigot/ tapered socket adhesive bonded joint for precise make-up to facilitate close tolerance piping. Used for 1 "-16" (25-400 mm) Bondstrand 2000/4000/5000/6000/7000 piping.



Socket Joint - Adhesive bonded straight socket joint with positive stops. This is the standard for Centricast piping systems




Fiberspar Mechanical Connectors Pipe-to-Pipe Connector and Flanged Service-End Connector - Available in Carbon Steel or 316/316L Stainless Steel. Other corrosion resistant alloys available upon request.




Secondary Containment

Two-piece secondary containment fittings are available in 3"-16" diameters for primary pipe sizes up to 14". The system is designed for maximum field flexibility, ease of installation, and the ability to use one size larger containment. When higher pressure, larger diameter or severe temperature changes are required, special fittings can be provided to handle the added requirements.


Epoxy Piping Systems




Centricast RB-2530 pipe is available in 1"-14" diameters with pressure ratings from 125-300 psig and temperatures up to 250°F (121°C), and is recommended for most caustics, salts, solvents and acids for chemical process solutions and abrasive slurries.




Centricast RB-1520 pipe is available in 1½"-14" diameters, with pressure ratings from 125-300 psig and temperatures up to 250°F (121°C), and is recommended for chemical process solutions, solvents, acids, caustics and salt solutions.




Green Thread HP pipe is available in 1"-42" diameters up to 225°F (125°C) (see note on HP pressure classes), and is recommended for dilute acids and caustics and industrial waste.




Red Thread HP pipe is available in 2"-42" diameters (see note on HP pressure classes) and temperatures up to 210° (99°C). Pipe sizes 2"-6" have special profile threads for quick and reliable assembly. This product is recommended for general industrial service.




Bondstrand 2000 pipe is available in 1"-16" diameters with pressure ratings up to 450 psig and temperatures up to 250°F (121°C). This product is recommended for dilute acids and caustics, and industrial waste.



Bondstrand 2400 pipe is available in 2"-40" diameters with (see note below for pressure capabilities) temperatures up to 250°F (121°C). Recommended for salt water, brackish water, fire protection, potable/waste water and sewage. Available in a conductive version for SX-EX applications



Bondstrand 3000, 3200 and 3300 series piping. They are recommended for general industrial service up to 210°F (99°C). The 3000 series pipe is available in 2"-16" diameters with pressure ratings up to 450 psig. The 3200 and 3300 series pipe are available in 8"-16" diameters with pressure ratings of 200 and 300 psig, respectively.



Bondstrand 4000 pipe is available in 1"-16" diameters with pressure ratings from 150 to 300 psig and temperatures up to 250°F (121°C) and is recommended for acid drains, chemical processes, slurries, non-oxidizing chemicals and acids.


NOTES:

HP pressure classes are 16, 20, 25, 32, 40 and 50 bar.


Bondstrand 2400 pressure classes are 10, 12, 14, 16, 20, 25, 32, 40 and 50 bar.

The above pressure classes are not available in all sizes.


Vinyl Ester Piping Systems




Centricast CL2030 pipe is available in 1"-14" diameters with pressure ratings up to 150 psig and is recommended for most chlorinated and acidic mixtures up to 175° (80°C) and other chemicals up to 200°F (93°C). This pipe is manufactured with a 100 mil liner.



F-Chem pipe is a special order product available in 14"-72" with a pressure rating of 50-150 psig and temperatures up to 225°F (121°C).



Centricast CL1520 pipe is available in 1"-14" diameters with pressure ratings up to 150 psig and is recommended for most chlorinated and acidic mixtures up to 175°F (80°C) and other chemicals up to 200°F (93.3°C). This pipe is manufactured with a 50 mil liner.



Bondstrand 5000 pipe is available in 1"-16" diameters for temperatures up to 200°F (93°C). This pipe is manufactured with a 50 mil liner. This is a custom vinyl ester pipe available in Asia, Europe and South America and is recommended for most chlorinated and acidic mixtures.

Polyplaster pipe is hand lay up pipe in diameters 1"-8" and is wound on a C.A.M. machine up to 100". A variety of vinyl ester/poly ester resin systems and liner thicknesses can be specified. Joint is butt and wrap.

SALES OFFICES
United States
17115 San Pedro Avenue, Ste 200
San Antonio, Texas 78232 USA
Phone: 210 477 7500
Fax: 210 477 7560

Canada
30 Strathlea Crescent SW
Calgary, Alberta Canada T3H 5A8
Phone: 403 660 4131
Fax: 403 246 7850

Mexico, Caribbean,
Central America
17115 San Pedro Avenue, Ste 200
San Antonio, Texas 78232 USA
Phone: 210 477 7500
Fax: 210 477 7560

South America
Estrada de acesso a Zone Industrial
Portuaria de Suape, s/nº Suape,
Ipojuca - PE - Brazil 55.590-000
Phone: 55 81 81312488

Central Asia / Russia
Microdistrict-13, Bldg-23, Apt. 4
Mangistau Region
Aktau, Kazakhstan
Phone: 7 701 5141087
Fax: 7 7292 436176

Middle East, N. Africa,
India
PO Box 61335
Jafza View 18, Office 0506
Jebel Ali Free Zone
Dubai, United Arab Emirates
Phone: 9714 886 5660
Fax: 9714 886 5670

Pacific Rim
7A Tuas Avenue 3
Singapore 639407
Phone: 65 6861 6118
Fax: 65 6862 1302

China
6 Ning Bo Road, Haping Road
Centralized, Industrial Park,
Harbin Development Zone
Harbin China 150060
Phone: 86 451 8709 1718
Fax: 86 451 8709 1719

Europe
De Panoven 20
Geldermalsen 4190 GW
Netherlands
Phone: 31 345 587 337

West Africa
P.O. Box 14148
Chioma Loveday Flats,
Chief Ogbonda's Compound, #105
Woji Road
Woji, Port Harcourt, RV 500001
Nigeria
Phone: 234 803 338 2623
Fax: 215 252 5140

MANUFACTURING

FACILITIES
San Antonio, Texas USA
Houston, Texas USA
Mineral Wells, Texas USA
Burkburnett, Texas USA
Wichita, Kansas USA
Little Rock, Arkansas USA
Sand Springs, Oklahoma USA
Johnstown, Colorado USA
Harbin, China
Suzhou, China
Recife, Brazil
Betim, Brazil
Sohar, Oman
Singapore
Senai, Johor, Malaysia

Downhole Solutions

Drilling Solutions

Engineering and Project Management Solutions

Lifting and Handling Solutions

Production Solutions

Supply Chain Solutions

Tubular and Corrosion Control Solutions

Well Service and Completion Solutions

Headquarters

17115 San Pedro Avenue, Ste 200
San Antonio, Texas 78232 USA
Phone: 210 477 7500
Fax: 210 477 7560

National Oilwell Varco has produced this brochure for general information only, and it is not intended for design purposes. Although every effort has been made to maintain the accuracy and reliability of its contents, National Oilwell Varco in no way assumes responsibility for liability for any loss, damage or injury resulting from the use of information and data herein. All applications for the material described are at the user's risk and are the user's responsibility. All brands listed are trademarks of National Oilwell Varco.



One Company . . . Unlimited Solutions

fgspipe@nov.com

www.fgspipe.com

© 2013 National Oilwell Varco
MM1000 - December 2013